

Safety isolating transformer

VC 3,2/1/8



Picture shows VC 16/2/18

Advantages

Minimum size at high output

Also with dual output voltage for series or parallel connection

Permanent corrosion protection, high insulation value and maximum electrical reliability thanks to XtraDenseFill resin encapsulation


Self-extinguishing potting material

Applications

As a mains transformer for adjustment of the voltage and simple electrical isolation.

As a safety transformer for the safe electrical isolation of the input and output sides. The transformer is suitable for creating SELV and PELV circuits because of the limit on the output voltage.

Sample application



Standards

Safety isolating transformer
to: VDE 0570 Part 2-6, DIN EN 61558-2-6, EN 61558-2-6, IEC 61558-2-6,
UL 5085-1/-2, CSA 22.2 No.66

Approvals



VDE, UL 5085-1/-2, CSA 22.2 No.66




Safety isolating transformer

VC 3,2/1/8

Type		VC 3,2/1/8
Electrical data	Input	
	Rated input voltage	230 Vac
	Rated frequency	50 - 60 Hz
	Output	
	Rated output voltage	8 Vac
	Rated Power	3.2 VA
	No-load voltage (app. x factor)	1.50
	No-load loss (typ.)	1.00 W
	Efficiency	60.0 %
	Standards	
	Classification	Safety isolating transformer
	Approvals	
	Approvals	cURus, VDE
	Environment	
	Ambient temperature max.	60 °C
Safety and protection		
Type	Encapsulated	
Insulation class	VDE=B, UL=class 105	
Protection index	IP 00	
Safety class (prepared)	II	
Short circuit strength	non-short-circuit proof	
Order numbers		
Order Number	VC 3,2/1/8	

Type		VC 3,2/1/8
Terminal and mounting		
Terminals		Pins for printed circuit boards
Measures and weights		
Pin (ø)		0.8 mm
Core type		EI 38/13,5
Weight		0.15 kg

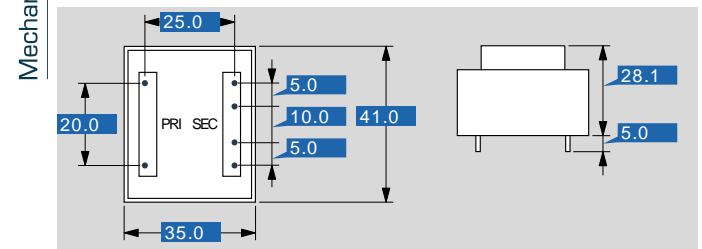

Subject to change.