

Safety isolating transformer VCM 5,0/2/18



Picture shows VCM 50/1/6

Advantages

Minimum size at high output

Also with dual output voltage for series or parallel connection

Permanent corrosion protection, high insulation value and maximum electrical reliability thanks to XtraDenseFill resin encapsulation

Self-extinguishing potting material


Additional mounting option with tabs on the enclosure

Applications

As a mains transformer for adjustment of the voltage and simple electrical isolation.

As a safety isolating transformer for the safe electrical isolation of the input and output sides. The transformer is suitable for creating SELV and PELV circuits because of the limit on the output voltage.

Sample application

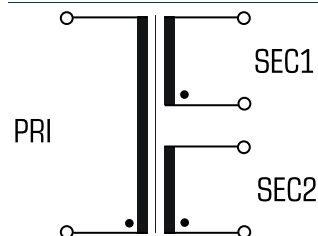


Standards

Safety isolating transformer
to: VDE 0570 Part 2-6, DIN EN 61558-2-6, EN 61558-2-6, IEC 61558-2-6,
UL 5085-1/-2, CSA 22.2 No.66

Approvals



VDE, UL 5085-1/-2, CSA 22.2 No.66




Safety isolating transformer VCM 5,0/2/18

Electrical data	Type	VCM 5,0/2/18
	Input	
	Rated input voltage	230 Vac
	Rated frequency	50 - 60 Hz
	Output	
	Rated output voltage	2 x 18 Vac
	Rated Power	5 VA
	No-load voltage (app. x factor)	1.25
	No-load loss (typ.)	1.50 W
	Efficiency	68.0 %
	Standards	
	Classification	Safety isolating transformer
	Approvals	
	Approvals	cURus, VDE
	Environment	
	Ambient temperature max.	50 °C
	Safety and protection	
	Type	Encapsulated
	Insulation class	VDE=B, UL=class 105
	Protection index	IP 00
	Safety class (prepared)	II
	Short circuit strength	non-short-circuit proof
	Order numbers	
	Order Number	VCM 5,0/2/18

Type	VCM 5,0/2/18
Terminal and mounting	
Fixing method	Fixing points on the case
Terminals	Pins for PCB
Measures and weights	
Pin (ø)	0.8 mm
Core type	EI 42/14,8
Weight	0.19 kg

30
Mechanical data

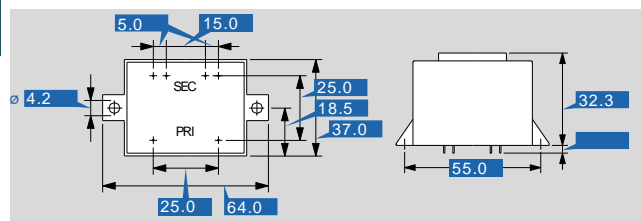

Subject to change.