



Picture shows BGE-095

Advantages

Variable foot angle for easy installation

Excellent corrosion protection and high abrasion resistance through powder-coated surface RAL 5008

With cooling fins for optimal heat extraction

Applications

Universal metal enclosure for degree of protection IP23

Approvals




Metal enclosures BGE-070

Electrical data

Type	BGE-070
Operating data	
Enclosure suitable for protection index	IP 23
For power (single-phase)*	15,000 VA
For power (three-phase)*	20,000 VA
Notes	
*	The indicated power is a guideline. Deviations may occur depending on the version of the transformer.
Order numbers	
Order Number	BGE-070

Mechanical data

Type	BGE-070
Terminal and mounting	
Cable glanding type	2 x M16 - M63
Cable glanding Ø	5 - 44 mm
Measures and weights	
Effective inside dimension (W)	597 mm
Effective inside dimension (H)	547 mm
Effective inside dimension (D)	417 mm
Weight	25 kg
Notes	
Notes	Not to be used as empty enclosure!

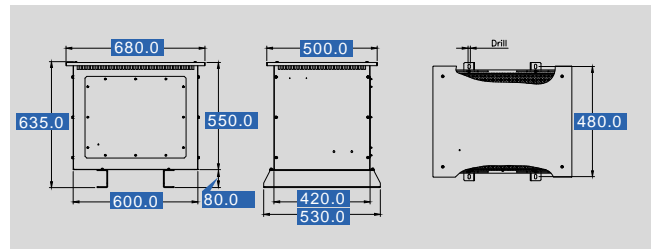

Subject to change.