


Line reactor, three-phase **LR3 48-3/250**

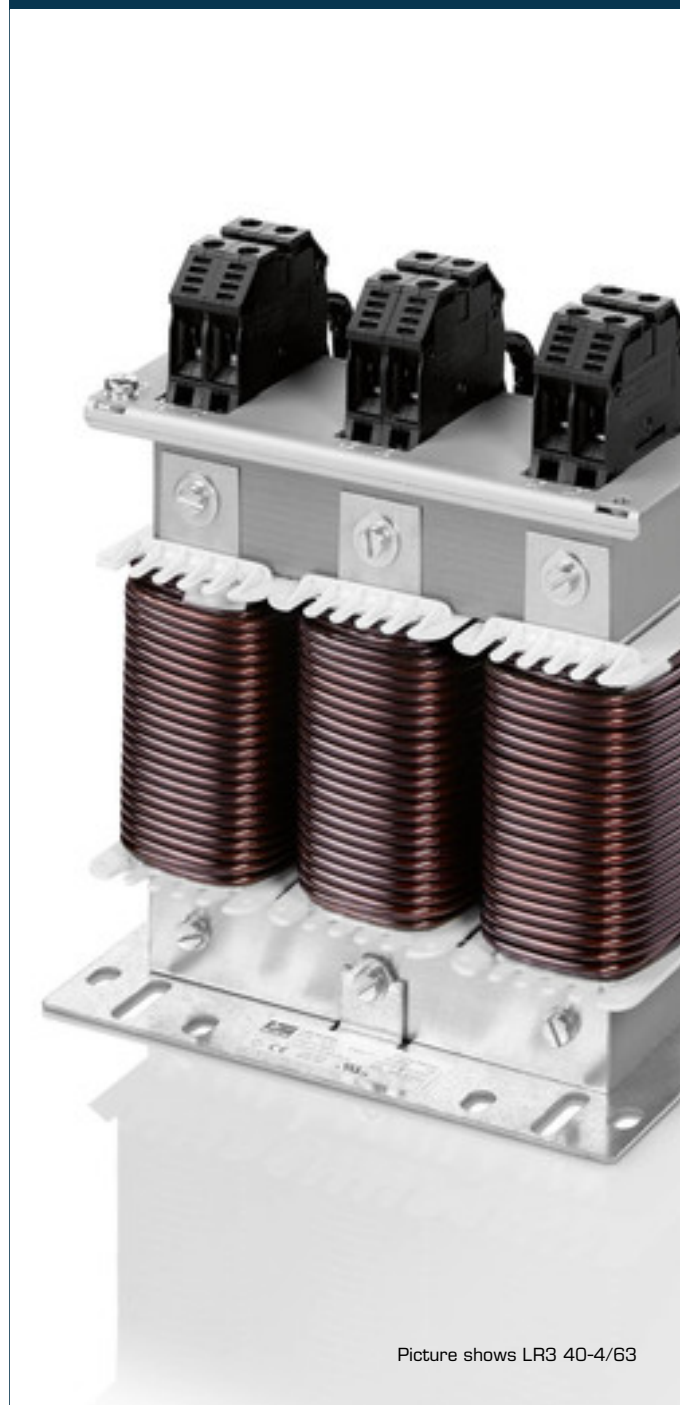

Advantages

- Use as line reactor, commutating reactor or PFC reactor
- Ensuring the short-circuit voltage of 3 - 5 % to the mains
- Power harmonic damping
- Starting current limitation
- Increases the service life of consumers
- Low ripple
- Bridging voltage dips
- Peak current limitation
- Very good corrosion protection and low noise thanks to vacuum impregnation
- Integrated lifting rings
- Multifunctional fixing rails

Applications

Line reactor to minimize mains pollution, to reduce the reactive-power components and charging currents in the DC link capacitor and to improve the $\cos(\phi)$.

Standards

Line- and commutation reactor to
DIN EN 61558-2-20, IEC 61558-2-20, UL 506, CSA 22.2

Approvals



UL 506, CSA 22.2



Line reactor, three-phase LR3 48-3/250

Type		LR3 48-3/250
Electrical data	Operating data	
	Rated voltage	3 x 480 Vac
	Short circuit voltage uK	3 % @ 480 Vac
	Voltage drop	8.3 Vac
	Rated current	250 A
	Rated frequency	50 - 60 Hz
	Inductance	0.088 mH
	Inductance deviation	±10%
	Approvals	
	Approvals	cURus, cULus
Environment		
Ambient temperature	-10 °C to +40 °C	
Type of cooling	AN	
Safety and protection		
Type	Open type	
Insulation class	IEC=F, UL=class 155	
Protection index	IP 00	
Safety class (prepared)	I	
Test voltage	4000 Vac	
Order numbers		
Order Number	LR3 48-3/250	

Type		LR3 48-3/250
Mechanical data	Terminal and mounting	
	Terminals phase	Flat copper for M8
	Fixing method	Fixing rail
	Fixing screws	M8
	Measures and weights	
	Weight	32.3 kg

