


Line reactor, three-phase **LR3 48-3/4**

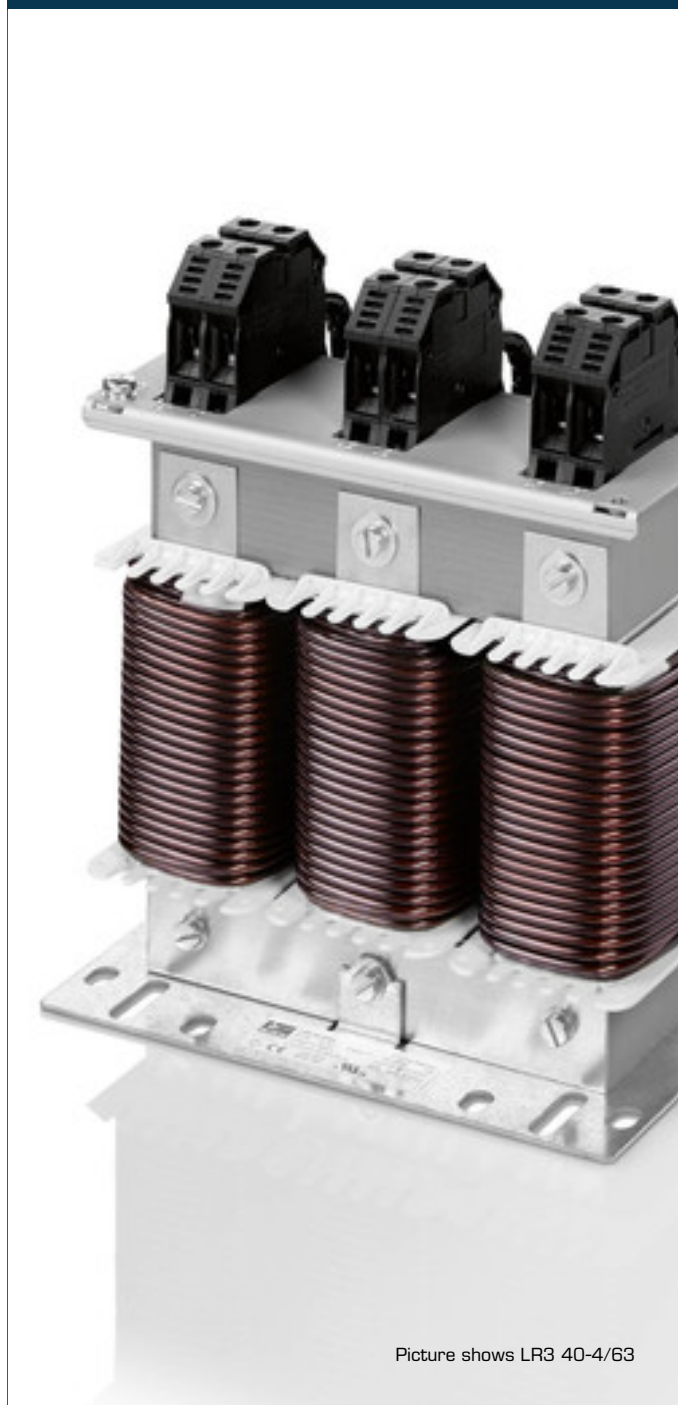

Picture shows LR3 40-4/63

Advantages

- Use as line reactor, commutating reactor or PFC reactor
- Ensuring the short-circuit voltage of 3 - 5 % to the mains
- Power harmonic damping
- Starting current limitation
- Increases the service life of consumers
- Low ripple
- Bridging voltage dips
- Peak current limitation
- Very good corrosion protection and low noise thanks to vacuum impregnation
- Integrated lifting rings
- Multifunctional fixing rails

Applications

Line reactor to minimize mains pollution, to reduce the reactive-power components and charging currents in the DC link capacitor and to improve the $\cos(\phi)$.

Standards

Line- and commutation reactor to
DIN EN 61558-2-20, IEC 61558-2-20, UL 506, CSA 22.2

Approvals



UL 506, CSA 22.2



Line reactor, three-phase LR3 48-3/4

Type	LR3 48-3/4
Electrical data	
Operating data	
Rated voltage	3 x 480 Vac
Short circuit voltage uK	3 % @ 480 Vac
Voltage drop	8.3 Vac
Rated current	4 A
Rated frequency	50 - 60 Hz
Inductance	5.500 mH
Inductance deviation	±10%
Approvals	
Approvals	cURus, cULus
Environment	
Ambient temperature	-10 °C to +40 °C
Type of cooling	AN
Safety and protection	
Type	Open type
Insulation class	IEC=B, UL=class 130
Protection index	IP 00
Safety class (prepared)	I
Test voltage	4000 Vac
Order numbers	
Order Number	LR3 48-3/4

Type	LR3 48-3/4
Mechanical data	
Terminal and mounting	
Terminals phase	Screw clamp, 4 mm ²
Terminals PE	Tab connector, 6.3 x 0.8 mm
Fixing method	Fixing rail
Fixing screws	M4
Measures and weights	
Weight	0.8 kg

