


Battery module

PVAF 24/3,2Ah Discontinued line - not for new designs

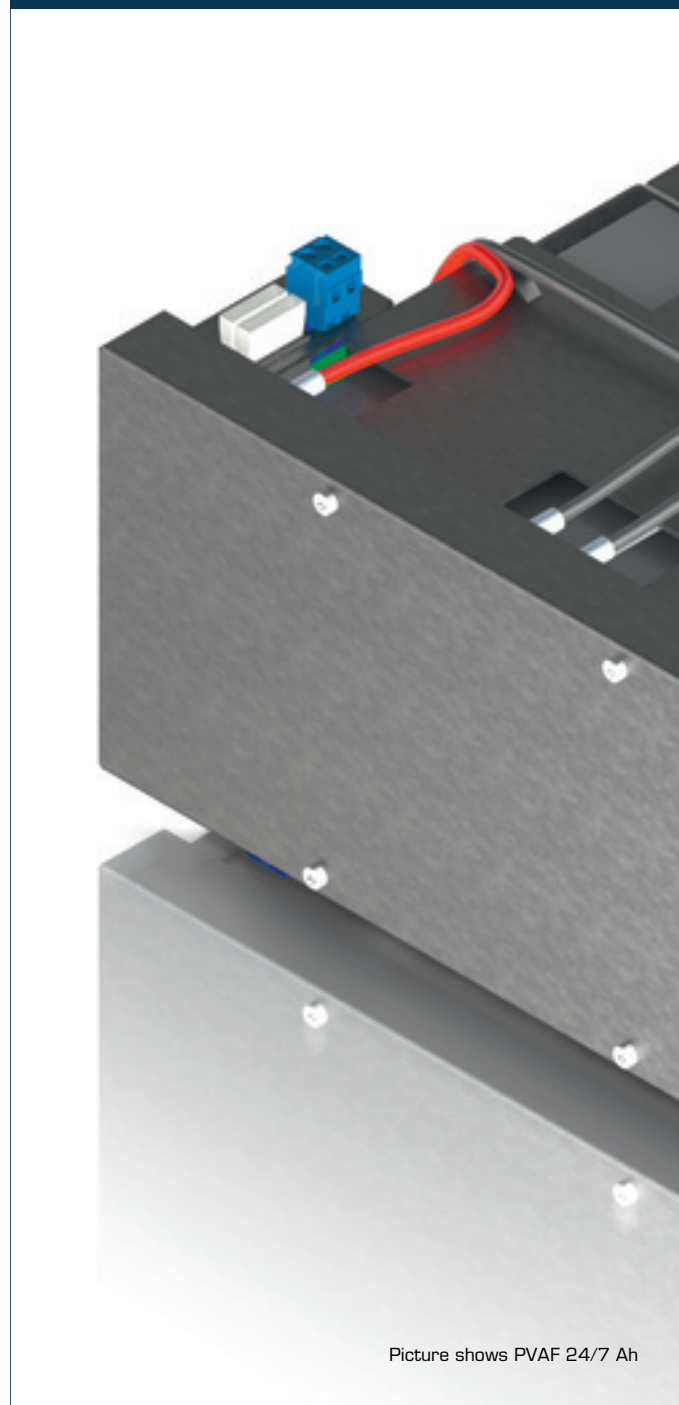

Picture shows PVAF 24/7 Ah

Advantages

Automatic detection of battery modules at UPS control unit

Reliable early warning signal when battery life expectancy is declining


Extended life expectancy through temperature controlled battery management

Service-friendly spring-loaded connector system

Applications

Battery module for building a secure 24 Vdc power supply in case of power failure.

Approvals




Battery module

PVAF 24/3,2Ah Discontinued line - not for new designs

Type	PVAF 24/3,2Ah Discontinued line - not for new designs
Electrical data	Input
	Input rated voltage 24 Vdc
	Rated capacity 3.2 Ah
	Output
	Output rated voltage 24 Vdc
	Output rated current max. 20.00 A
	Internal fuse 25 A (slow blow)
	Parallel connection Yes
	Environment
	Ambient temperature -10 °C to +40 °C
Safety and protection	Storage temperature -20 °C to +40 °C
	Service life 5 years at 20 °C
	Latest commissioning (only accumulators) 6 months at 30 - 40 °C
Order numbers	
Order Number	PVAF 24/3,2Ah Discontinued line - not for new designs

Type	PVAF 24/3,2Ah Discontinued line - not for new designs
Mechanical data	Terminal and mounting
	Terminals input / output (spring clamp terminal, pluggable) max. 2.5 mm ²
	Terminals temperature measurement, (spring clamp terminal, pluggable) max. 2.5 mm ²
	Fixing method DIN Rail system TS35, screwed mounting
Measures and weights	
Weight	3.9 kg

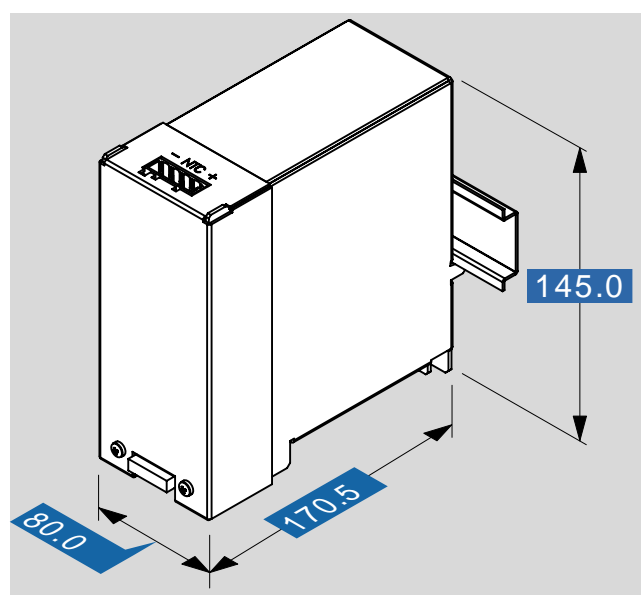

Subject to change.