

|  |                            |   |
|--|----------------------------|---|
| <b>Product Ident</b><br><b>BGE-080</b> | <b>Enclosure Datasheet</b> |  |
|--|----------------------------|---|

## Identification

|                  |                |          |                    |
|------------------|----------------|----------|--------------------|
| Type Designation | <b>BGE-080</b> | Material | <b>Sheet Metal</b> |
| Series           | <b>BGE</b>     | Color    | <b>RAL 5008</b>    |

## Applications

IP23 rated universal enclosure

## Standards

|   |      |  |
|---|------|--|
| IEC/EN 60529                                  | IP23 | 2: Protected against solid objects > 12.5mm (e.g. Fingers) |
| (please contact factory for higher IP Rating) |      | 3: Protected against spraywater                            |
| NEMA - Rating                                 |      | 2  |


## Operation

|          |       |
|----------|-------|
| Mounting | Floor |
|----------|-------|

## Openings

|                                 |            |
|---------------------------------|------------|
| Wire feed though opening [inch] | 0.2 - 1.73 |
|---------------------------------|------------|

## Dimensions

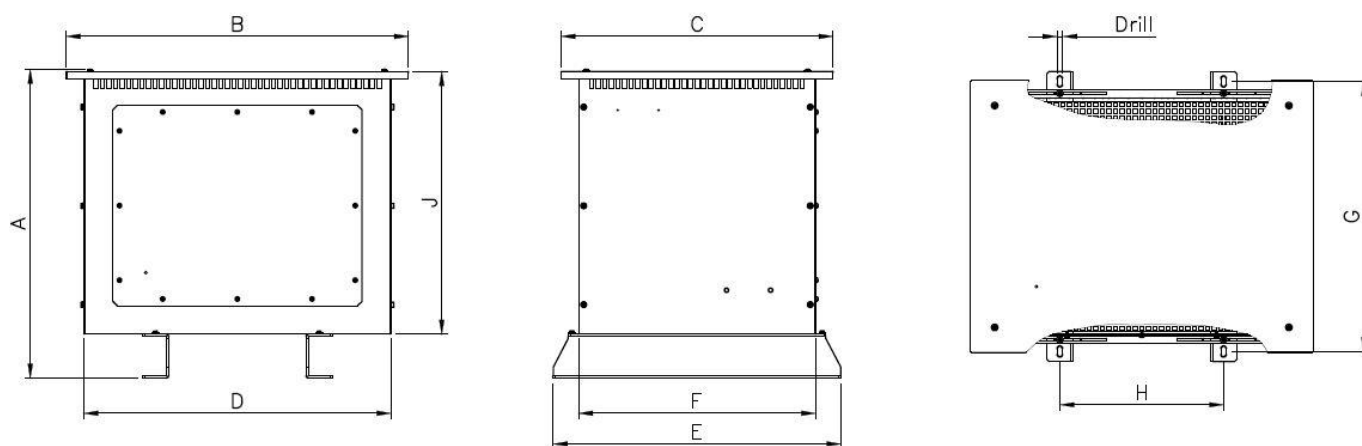

| Outer Dimensions |       |       |       |           |       |       |       |                  |                  |       |            |
|------------------|-------|-------|-------|-----------|-------|-------|-------|------------------|------------------|-------|------------|
|                  | A     | B     | C     | D         | E     | F     | G     | H <sub>min</sub> | H <sub>max</sub> | J     | Drill      |
| US [inch]        | 27.68 | 30.71 | 24.41 | 27.56     | 25.79 | 21.26 | 24.21 | 8.66             | 24.61            | 23.74 | 0.51 x 1.0 |
| Inner Dimensions |       |       |       | Weight    |       |       |       |                  |                  |       |            |
|                  | Hight | Width | Depth |           |       |       |       |                  |                  |       |            |
| US [inch]        | 23.44 | 27.44 | 21.20 | 88.00 lbs |       |       |       |                  |                  |       |            |

## Notes

|   |
|---|
| Technical specifications in the drawing are not binding. General tolerance to DIN 7168-m. Subject to change.  |
| Variations may apply due to material's and production's tolerances. Objected to modifications without notice. |

|                |            |  |           |           |
|----------------|------------|--|-----------|-----------|
| Original Date: | 1/24/2017  | Observe protection clause to ISO 16016 | Index     | 0         |
| Name:          | C. Wesner  |  | Doc. type | Datasheet |
| Date:          | 1/24/2017  |  |           |           |
| Checked:       | Siatkowski |  | Pages     | 1 of 1    |