

Safety isolating transformer FL 2/8



Picture shows FL 42/12

Advantages

- Minimum size at high output
- Low height
- Dual input voltage for series or parallel connection
- Dual output voltage for series or parallel connection
- Permanent corrosion protection, high insulation value and maximum electrical reliability thanks to XtraDenseFill resin encapsulation
- Self-extinguishing potting material

Applications

As a mains transformer for adjustment of the voltage and simple electrical isolation.

As an isolating transformer for the safe electrical isolation of the input and output sides. The transformer may be used to set up protective separation as a protective measure in accordance with VDE 0100.

As a safety isolating transformer for the safe electrical isolation of the input and output sides. The transformer is suitable for creating SELV and PELV circuits because of the limit on the output voltage.

Sample application



Standards

Safety isolating transformer
to: VDE 0570 Part 2-6, DIN EN 61558-2-6, EN 61558-2-6, IEC 61558-2-6,
UL 5085-1/-2, CSA 22.2 No.66

Approvals




VDE, UL 5085-1/-2, CSA 22.2 No.66



Safety isolating transformer FL 2/8

Electrical data		Type	FL 2/8
Input			
Rated input voltage			2 x 115 Vac
Rated frequency			50 - 60 Hz
Output			
Rated output voltage			2 x 8 Vac
Rated Power			2 VA
No-load voltage (app. x factor)			1.35
No-load loss (typ.)			0.60 W
Efficiency			66.0 %
Standards			
Classification			Safety isolating transformer
Approvals			
Approvals			cURus, VDE
Environment			
Ambient temperature max.			40 °C
Safety and protection			
Type			Encapsulated
Insulation class			VDE=E, UL-class 105
Protection index			IP 00
Safety class (prepared)			II
Short circuit strength			non-short-circuit proof
Order numbers			
Order Number			FL 2/8

Mechanical data		Type	FL 2/8
Terminal and mounting			
Terminals			Pins for PCB
Measures and weights			
Core type			UI 30/5,5
Weight			0.12 kg

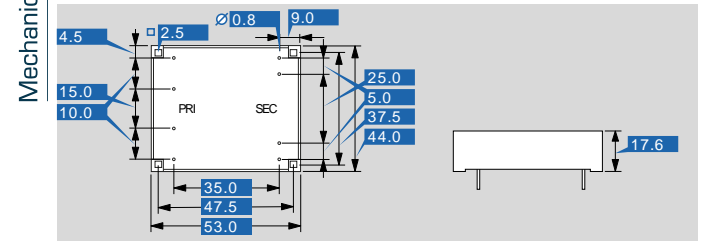

Subject to change.