


## Line reactor, three-phase **LR3 48-3/20**

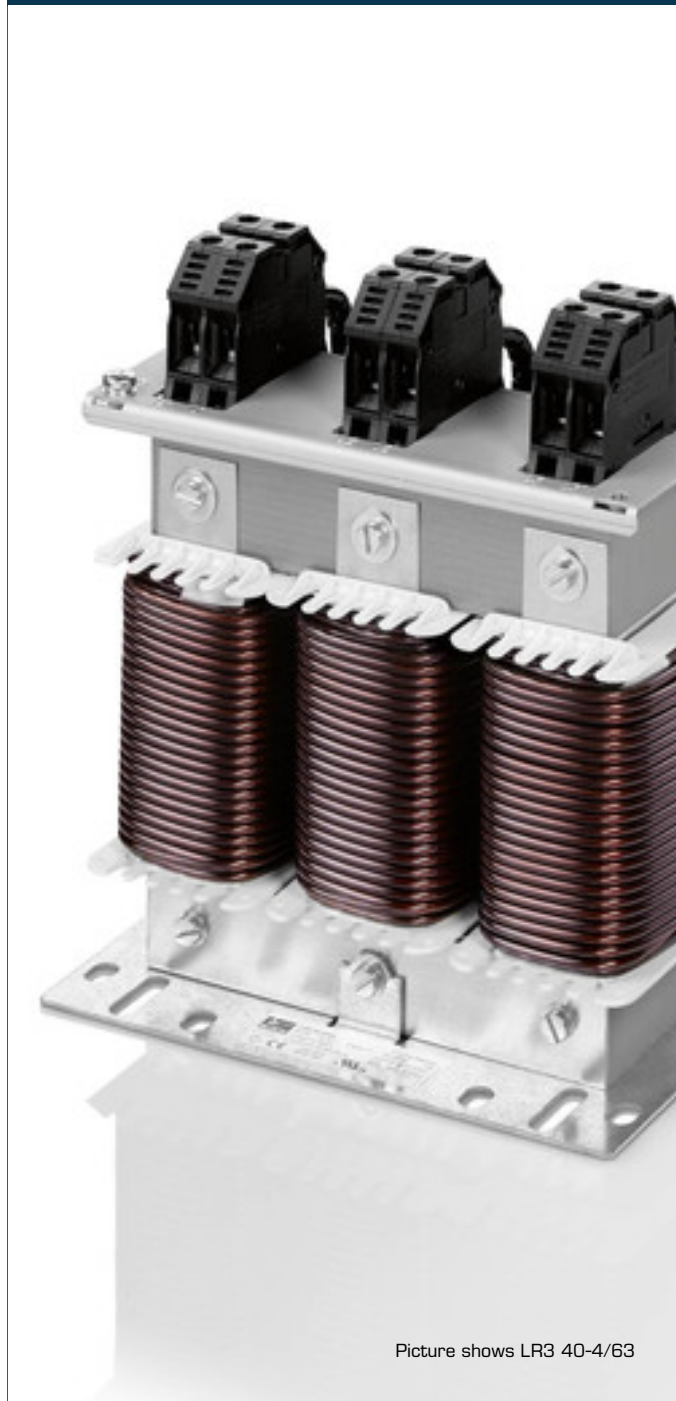

Picture shows LR3 40-4/63

### Advantages

Use as line reactor, commutating reactor or PFC reactor
Ensuring the short-circuit voltage of 3 - 5 % to the mains
Power harmonic damping
Starting current limitation
Increases the service life of consumers
Low ripple
Bridging voltage dips
Peak current limitation
Very good corrosion protection and low noise thanks to vacuum impregnation
Integrated lifting rings
Multifunctional fixing rails

### Applications

Line reactor to minimize mains pollution, to reduce the reactive-power components and charging currents in the DC link capacitor and to improve the  $\cos(\phi)$ .

### Standards

Line- and commutation reactor to  
DIN EN 61558-2-20, IEC 61558-2-20, UL 506, CSA 22.2

### Approvals



UL 5085-1/-2, CSA 22.2 No.66



## Line reactor, three-phase LR3 48-3/20

Type		LR3 48-3/20
Electrical data	Operating data	
	Rated voltage	3 x 480 Vac
	Short circuit voltage uK	3 % @ 480 Vac
	Voltage drop	8.3 Vac
	Rated current	20 A
	Rated frequency	50 - 60 Hz
	Inductance	1.100 mH
	Inductance deviation	±10%
	Approvals	
	Approvals	cURus, cULus
	Environment	
	Ambient temperature	-10 °C to +40 °C
	Type of cooling	AN
	Safety and protection	
Type	Open type	
Insulation class	IEC=F, UL=class 155	
Protection index	IP 00	
Safety class (prepared)	I	
Test voltage	4000 Vac	
Order numbers		
<b>Order Number</b>	<b>LR3 48-3/20</b>	

Type		LR3 48-3/20
Mechanical data	Terminal and mounting	
	Terminals phase	Screw clamp, 4 mm <sup>2</sup>
	Terminals PE	for M5
	Fixing method	Fixing rail
	Fixing screws	M5
Measures and weights		
Weight	3.7 kg	

