

## Safety isolating transformer VC 3,2/1/24



Picture shows VC 16/2/18

### Advantages

Minimum size at high output

Also with dual output voltage for series or parallel connection

Permanent corrosion protection, high insulation value and maximum electrical reliability thanks to XtraDenseFill resin encapsulation


Self-extinguishing potting material

### Applications

As a mains transformer for adjustment of the voltage and simple electrical isolation.

As a safety transformer for the safe electrical isolation of the input and output sides. The transformer is suitable for creating SELV and PELV circuits because of the limit on the output voltage.

### Sample application



### Standards

Safety isolating transformer  
to: VDE 0570 Part 2-6, DIN EN 61558-2-6, EN 61558-2-6, IEC 61558-2-6,  
UL 5085-1/-2, CSA 22.2 No.66

### Approvals



VDE, UL 5085-1/-2, CSA 22.2 No.66



# Safety isolating transformer


## VC 3,2/1/24

### Electrical data

Type	VC 3,2/1/24
Input	
Rated input voltage	230 Vac
Rated frequency	50 - 60 Hz
Output	
Rated output voltage	24 Vac
Rated Power	3.2 VA
No-load voltage (app. x factor)	1.50
No-load loss (typ.)	1.00 W
Efficiency	60.0 %
Standards	
Classification	Safety isolating transformer
Approvals	
Approvals	cURus, VDE
Environment	
Ambient temperature max.	60 °C
Safety and protection	
Type	Encapsulated
Insulation class	VDE=B, UL=class 105
Protection index	IP 00
Safety class (prepared)	II
Short circuit strength	non-short-circuit proof
Order numbers	
Order Number	VC 3,2/1/24

### Mechanical data

Type	VC 3,2/1/24
Terminal and mounting	
Terminals	Pins for printed circuit boards
Measures and weights	
Pin (ø)	0.8 mm
Core type	EI 38/13,5
Weight	0.15 kg

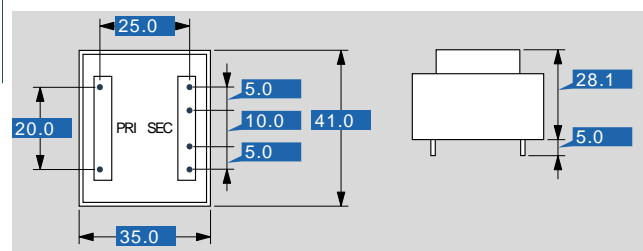

Subject to change.